




42' BELLY DUMP TRAILERS



- 25k Meritor Axles
- Ridewell Air-Ride Suspension
- Adjustable Gate Stops
- Safety Lock to Lock Gate Open for Cleaning & Maintenance
- Gate Control With Electric Over Pneumatic Control Valve
- Recessed Led Lighting System
- Removable Gate Mounted Landing Gear
- Heavy Duty Bolt on Push Block
- 60 Gallon Air Tank

- Removable / Replaceable Aluminum Diamond Plate Fenders
- Heavy Duty Oscillating King Pin
- Adjustable Double Action Gates
- 10' 5" x 5' 5" Gate Opening
- AR 200 Hopper Sidewalls
- Chip Guard Coated Clams and Suspension to Prevent Corrosion

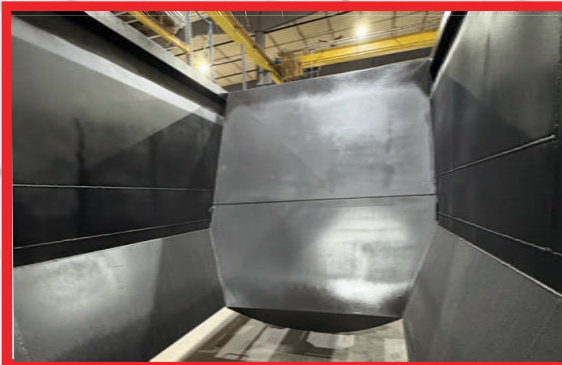

The Precision prospector has been a very dependable and hard worked trailer. Our jobs have been completed without any downtime. It is definitely a premier trailer and would highly recommend the Precision Prospector to anyone in the industry.


Jim Anderson
— Border States Paving

MANUFACTURERS OF: TRUCK BODIES • TRAILERS • FLATBEDS
SERVING: AGRICULTURE • CONSTRUCTION • DISTRIBUTORS



Fargo, ND • 800-237-5161

PRECISION PROSPECTOR TRAILER SPECIFICATIONS

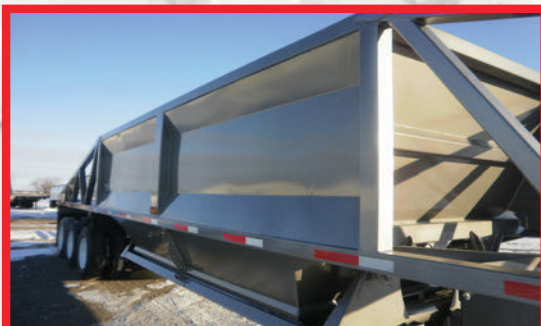

Length	42'
Height-Ground to Top Rail	103"
Weight	16,700
Closed Belly Clearance Empty (approx.)	12"
Capacity (Cubic Yards)	25
Tub Slope	67 deg
King Pin Setting	17"
Hopper Construction	AR200
Lower Hopper Opening	10.5' x 5.5'
Upper Hopper Opening	16'6" x 7'4"

STANDARD FEATURES ON PRECISION PROSPECTOR TRAILERS

- *Removable/Replaceable Aluminum Diamond Plate Fenders
- *25K 10-Hole Hub Piloted Axles With ABS System
- *Ridewell Air-Ride Suspension
- *Sealed Commercial Wiring Harness System
- *7-Way Recepticle W/Breakers
- *LED Lighting
- *DOT Conspicuity Tape
- *Protected Valve Control Station
- *Manifest Holder
- *Greaseable Hanger Pins
- *Protected Slack Adjusters
- *RTP Construction Grade Tires
- *Rear Lift Axle



OPTIONS

- *Low Pro & High Pro Tire Packages
- *Push Block Rear w/ Bucket Deflector
- *Push Block Rear w/ Pintle Hitch
- *Front Mudflaps
- *Shur-Loc Roll Tarp
- *Electric Roll Tarp
- *Aluminum Hub Pilot Wheels
- *Cab Clam/Lift Axle Control

